




High resolution signal analysis...

CAM1: Spectrum Analyser

Most audio workstations use FFT spectrum analysers. With frequency bins of equal width, these suffer from very poor resolution, especially at low frequencies, making them unsuitable for serious audio analysis. For example, an analyser with 1,000 bins operating at 96kHz will have a resolution of, at best, 96Hz. This is more than two octaves at bass frequencies, and is entirely useless for observing low frequency signals or degradations such as hums and buzzes.

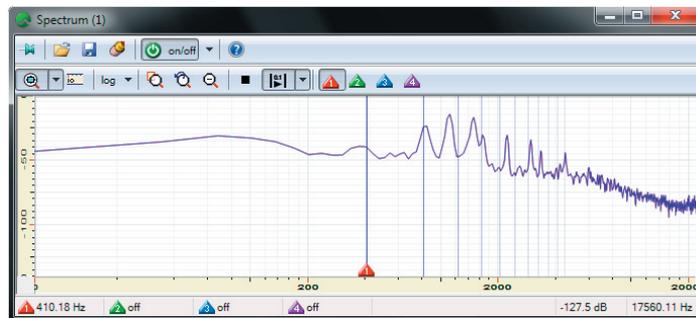

The Solution

The CEDAR Cambridge Spectrum Analyser is not an FFT analyser; it is more akin to the analysers found in electronic design laboratories, and it offers a superb resolution of 0.02Hz. This is approximately 5,000 times more accurate than the FFT analyser described above.

Real-time, averaging, windowing, minimum-hold and maximum-hold display modes dramatically enhance its usefulness when performing noise reduction, debuzzing, and other restoration tasks, and it is particularly useful when performing audio forensic analysis and processing.

With additional facilities such as Select and Zoom, the ability to measure the difference in gain and frequency between points on the screen, linear and logarithmic displays, and CEDAR's unique Markers that let you transfer frequency information between CEDAR Cambridge processes, the CEDAR Cambridge Spectrum Analyser is the most advanced and most useful tool of its type.

Audio industry spectrum analysis at laboratory resolution

CEDAR 
Cambridge



www.cedaraudio.com
CEDAR Audio Ltd +44 1223 881771
CEDAR Audio USA +1 207 828 0024
CEDAR Deutschland +49 5481 945087
CEDAR Security (Asia & ME) +66 81 822 9227